Quick Start Card

Wireless USB Dongle Setup

Configuring the Projector:

1. Plug in the mini USB WiFi dongle into the USB port on the back of the projector. Turn on the projector.
2. Ensure that the projector's home menu is displayed on the screen.
3. Using the arrow keys on the projector's keypad or the remote control, select "mini USB" and push Enter.
4. Select "WiFi Display" and press Enter. The projector will now display its SSID and IP address.

Setting up a PC/Mac:

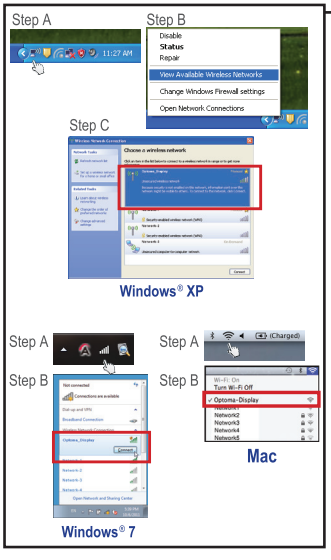

1. On Windows 7, click on wireless icon available in the system tray at the bottom right of the screen and click on Optoma-Display to connect. On a Mac, click on the wireless icon in the system tray available at the top of the screen and click on Optoma-Display to connect.
2. If Optoma-Display is not shown on the list, push the Refresh button (available in the same window).
3. Open the browser and type in http://192.168.100.10 to download and install the MirrorOp application.
4. Run the application and click on play/resume icon pictured here.

Presenting through an iPhone/iPad:

1. Download "WiFiDoc" application from the Apple App store.
2. Disconnect your existing WiFi network connection and connect to the projector's network with SSID: Optoma-Display (Settings>WiFi >Optoma-Display).
3. Push the Home button on iPhone to exit and tap on WiFiDoc application.
4. Click on Optoma-Display and click on the desired presentation.